




Brass/Stainless Steel Valves

H L B B 0 1 / X X X
H L B B 0 2 / X X X

PN16 Lockable Ball Valve

Model: ALV-S-PN16

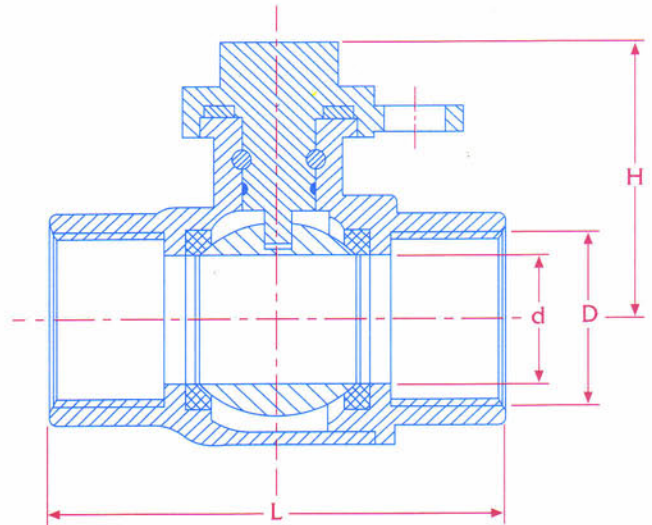

Materials

Parts	QTY	ASTM Materials	
		Forged Brass	CF8
Body	1	Forged Brass (B283)	A351 GR. CF8
Cap	1	Forged Brass (B283)	A351 GR. CF8
Stem	1	Forged Brass (B283)	A351 GR. CF8
Ball	1	Chromed Forged Brass (B283)	A351 GR. CF8
Ball Seat	2	PTFE	PTFE
O-ring	3	Synthetic Rubber	Synthetic Rubber

Features

Threaded ends to BSPT (BS21) or NPT (ANSI BI.20.1)	
Face-to-Face or End-to-End : ARITA Standard	
Wall thickness : ARITA Standard	
Application : Water, Oil, Gas, and Steam	

Hydrostatic shell test	3.24 MPa	(33 kgf/cm ²)
Hydrostatic seat test	2.37 MPa	(24.2 kgf/cm ²)
Pneumatic seat test	0.59 MPa	(6 kgf/cm ²)

Dimensions

mm

SIZE		d	D	H	L	Weight (kg)	
						Forged Brass Lockable Ball Valve	SUS 304 Lockable Ball Valve
inch	3/4	20	25	45	68	0.420	0.350
mm	20						