




UNIMECH GROUP, MALAYSIA

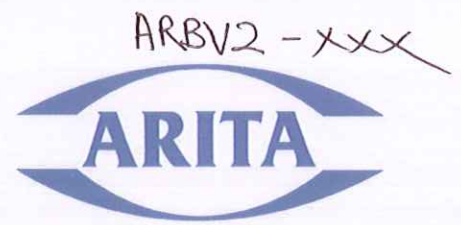


A MEMBER OF UNIMECH GROUP, MALAYSIA

CAST STEEL BALL VALVE CLASS 300 FLANGED END

Materials of parts

No	Part Name	ASTM Material		
		Carbon Steel	18Cr-9Ni-2Mo	Carbon Steel
1	Body	A216-WCB	A351-CF8M	A352-LCB
2	Cap	A216-WCB	A351-CF8M	A352-LCB
3	Ball	A182-F304 ¹⁾	A182-F316	A182-F304 ¹⁾
4	Stem	A276-304	A276-316	A276-304
5	Seat Ring	R.PTFE		
6	Cap Gasket	Graphite+304 ²⁾	PTFE	Graphite+304 ²⁾
7	Cap Stud	A193-B7	A193-B8	A320-L7
8	Cap Stud Nut	A194-2H	A194-8	A194-4
9	Packing	PTFE		
10	Gland Flange	A216-WCB	A351-CF8M	A352-LCB
11	Gland Bolt	A193-B7	A193-B8	A193-B7
12	Stop Plate	Carbon Steel	Carbon Steel+Zn	Carbon Steel
13	Lever	Carbon Steel		

Note: 1). A105+ENP optional
 2). Spiral wound construction.
 3). Hard Surface: tungsten carbide, chromium carbide or other material.

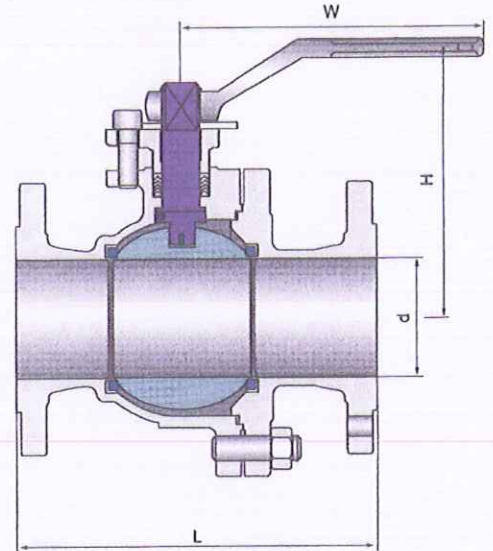

Applicable standards:


- STEEL BALL VALVES, API 608/API 6D
- STEEL BALL VALVES, ISO 10434/ISO 14313
- FIRE DURABLE, API 607
- ANTI STATIC, API 608
- STEEL VALVES, ASME B 16.34
- FACE TO FACE, API 6D
- END FLANGES, ASME B 16.5
- BUTTWELDING ENDS, ASME B 16.25
- INSPECTION AND TEST, API 598/API 6D

Design description:


- FULL PORT DESIGN
- BB, BOLTED CAP, SPLIT BODY
- FLOATING BALL TYPE
- BLOW-OUT PROOF STEM
- FIRE DURABLE CONSTRUCTION
- ANTI STATIC DEVICE
- STOPPER DEVICE
- ISO5211 MOUNTING PAD
- FLANGED OR BUTT WELDING ENDS
- AVAILABLE WITH WG OPERATOR



SOFT SEAL SEAT



METAL SEAL SEAT



Dimensions data

NPS	1/2	3/4	1	1 1/2	2	2 1/2	3	4	6	8	10	12	in
DN	15	20	25	40	50	40	80	100	150	200	250	300	mm

ANSI Class 300

L (RF)	5.50	6.00	6.50	7.50	8.50	9.50	11.12	12.00	15.88	19.75	22.38	25.50	in
	140	152	165	190	216	241	283	305	403	502	568	648	mm
L1 (BW)	5.50	6.00	6.50	7.50	8.50	9.50	11.12	12.00	18.00	20.50	22.00	25.00	in
	140	152	165	190	216	241	283	305	457	521	559	635	mm
H	2.12	2.12	2.75	3.50	4.12	6.12	7.25	8.00	10.00	11.00	13.50	16.50	in
	55	55	70	90	105	153	187	206	255	280	345	420	mm
(d)	13	19	25	38	49	62	74	100	150	201	252	303	mm
W	5	5	6	8	14	16	20	20	24	32	32	32	in
	130	130	160	200	350	400	500	500	600	800	800	800	mm
WT (kg)	2.5	3.5	5.5	10.5	14.5	23.5	30	55	118	200	250	330	RF
	1.8	2	3.2	5.5	8.7	15	18	36	85	152	182	232	BW

DISTRIBUTED BY

WISMA UNIMECH

4934, JALAN CHAIN FERRY,
 12100 BUTTERWORTH, MALAYSIA.
 TEL : 04-332 8823 FAX : 04-3325176
 WEBSITE : www.unimechgroup.com
 Email : jl.lim@unimechgroup.com



The contents of this literature are for informative purposes only. Unimech is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Unimech or its distributors. Unimech reserves the right to change or modify product design without prior notice.